

## Threaded Ends

### DESCRIPTION AND GENERAL PERFORMANCE SPECIFICATIONS

The V-Cone® flowmeter is a patented, differential pressure type flow measurement device. A cone is positioned in the center of the pipe to increase the velocity of the flowing fluid and create a differential pressure. This pressure difference can be measured and used to accurately interpret flowrate. Two taps are provided on every V-Cone to allow sensing of the high and low pressures. A typical V-Cone application can follow these general performance specifications:


- Accuracy: up to ±0.5% of rate
- Repeatability: ±0.1%
- Turndown: 10:1
- Standard Betas: 0.45 through 0.85
- Headloss: Percentage of differential pressure produced varies with beta ratio.
- Installation: Typically 0-3 diameters upstream and 0-1 diameters downstream.

\* Each V-Cone is sized for the intended application. Specific performance ratings must be obtained through the sizing process.



The V-Cone is manufactured under a quality management system that is certified to ISO 9001:2000.

### MODEL VT DIMENSIONS

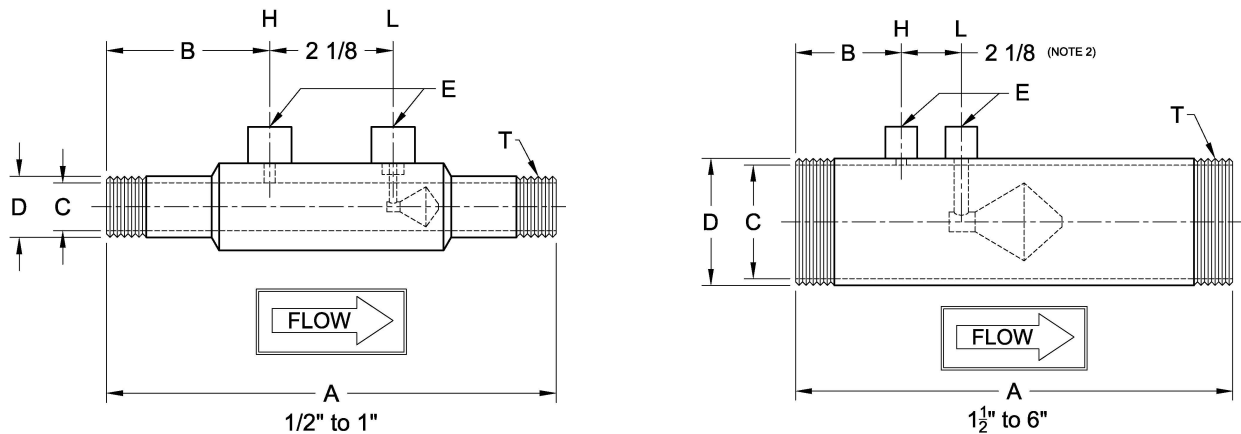

### DIMENSION TABLE

Size	A (Note 1)		B		C-Stainless (Note 2)		C-Carbon (Note 2)		D		E (Note 2)	T
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	NPT	NPT
½	7.75	197	2.81	71.4	0.622	15.8	-	-	0.84	21.3	¼	½
¾	7.75	197	2.81	71.4	0.824	20.9	-	-	1.05	26.7	¼	¾
1	7.75	197	2.81	71.4	1.049	26.64	-	-	1.315	33.4	¼	1
1½	9.75	248	2.88	73.2	1.645	41.78	-	-	1.9	48.3	¼	1½
2	11.63	295	3.31	84.1	2.104	53.44	-	-	2.375	60.3	½	2
2½	11.50	292	3.25	82.6	2.504	63.60	-	-	2.875	73.0	½	2½
3	13.50	343	3.25	82.6	3.104	78.84	-	-	3.5	88.9	½	3
4	15.50	394	3.75	95.3	4.090	103.8	-	-	4.5	114	½	4
6	21.50	546	4.00	102	6.065	154.1	6.065	154.1	6.625	168	½	6

1. Overall length (A) tolerance varies with line size: ½" to 1", ±0.01" (±0.3mm); 1½" to 4", ±0.06" (±2mm); 6", ±0.12" (±4mm).
2. Typical values shown.
3. Wall pressure ports are required for vertical up flow applications.



# CONFIGURATION SHEET

## MODEL NUMBER CONFIGURATION VT

Type	Size	Materials‡		Pipe Schedule		End Connections		Fittings	
<b>VT</b>									
	0A 1/2"	Q	S304	A	10	02	Threaded	N	NPT
	0B 3/4"	L	S304L	B	20			S	Socket
	01 1"	A	S316L	D	Std				Several types of fittings
	0C 1 1/2"	P	CPVC	E	40				
	02 2"	S	CS Tube & Flanges	F	80				
	0D 2 1/2"		S304 Cone, Support, & Couplings	J	100				
	03 3"		Epoxy Coated Blue (excluding cone)	K	120	‡Other materials can include:			
	04 4"	U	CS Tube & Flanges	L	140	HASTELLOY C-276	S321H		
	06 6"		S304 Cone, Support, & Couplings	G	160	DUPLEX 2205	INCONEL 625		
			Coating / Painting Per Customer Req.	H	XXS	CHROMEMOLY P22/P11	PVC		
				M	10S	MONEL K400/K500	PTFE		
				P	XS	CARBON STEELS			
						A350, A333, API5L, A106B			

Example: VT01QC02N V-Cone 1 inch line size, S304, bored to schedule 40, 1" threaded ends, 1/2" NPT fittings

### STANDARD PIPE SCHEDULES

Stainless Steel		Carbon Steel	
Size	Std.	Size	Std.
1/2" to 6"	E	6"	E

### ABBREVIATIONS

ASME	American Society of Mechanical Engineers
NPT	National pipe taper
SS	Stainless steel
CS	Carbon steel

Technical questions can be answered through a local representative or through our application engineers.

### MANUFACTURING STANDARDS

McCrometer's welders and welding procedures are qualified in accordance with ASME Section IX. All meters are visually inspected for weld defects. Specific customer requirements can be complied with upon request.

The welding can be in accordance with:

- ASME Section VIII
- ASME B31.1
- ASME B31.3

Non-destructive testing can include:

- Hydrostatic Pressure Testing
- Penetrant Examination
- Radiographic Examination
- Positive Material Inspection
- Magnetic Particle Examination

REPRESENTED BY:

